


Low-investment side labelling machine

- > **Availability:** At very short notice
- > **Applicator:** The outstanding [HERMA 400](#)
- > **Flexible:** Available in standard lengths* of:
approx. 1500/2000 mm, or 60/80"
and four standard widths:
50/100/150/250 mm, or 2/4/6/10"

*individual lengths on request

A compact, sturdy labelling machine that works without change parts. The advantage: quick, straightforward and flexible retooling for precise [side labelling](#). This system is distinguished by its outstanding production efficiency in combination with low investment costs.

A synchronous top belt can be used to stabilize the products. The modular system can be fitted with either one or two [HERMA 400](#) applicators equipped with a pivot beak. A printer can be installed if required to allow for optional label overprinting, such as the date of manufacture or a sell-by date.

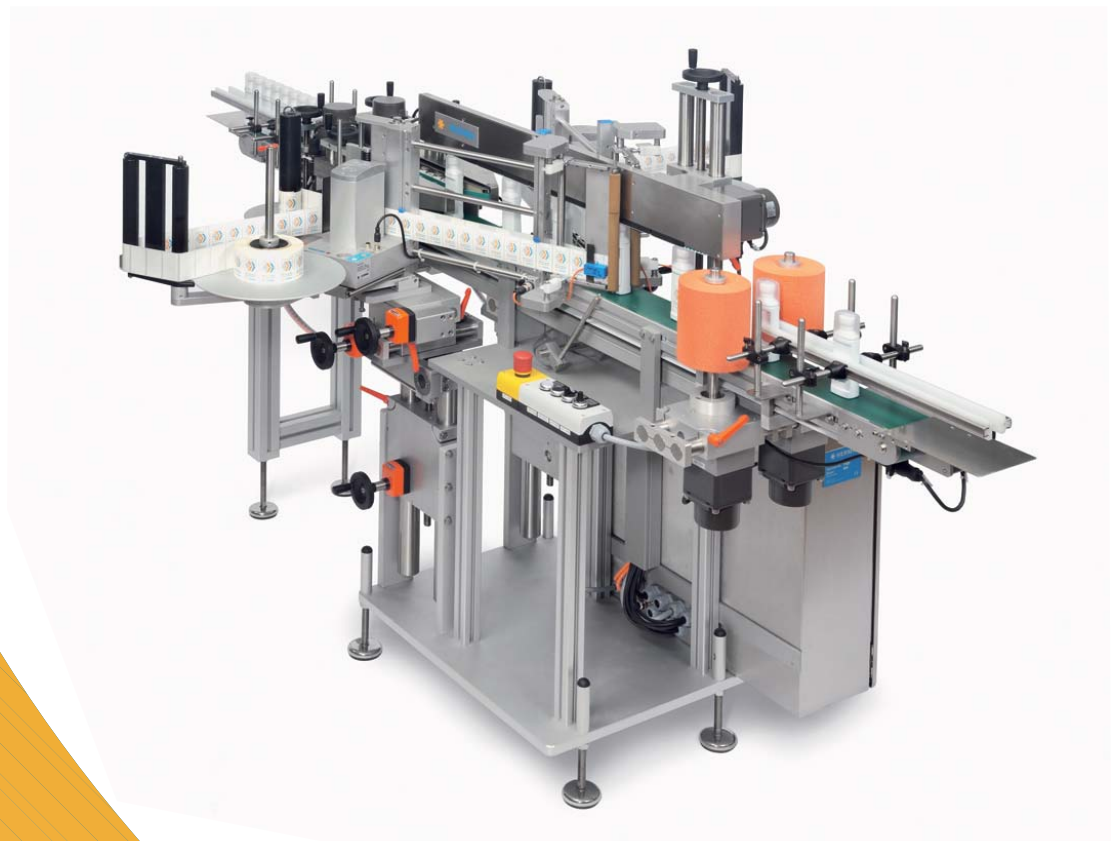



Products being separated, aligned, and stabilized.

Technical data of the 362 C

Products	Rectangular oval/stable
Width	25 to 260 mm (1" to 10.2")
Max. height	290 mm (11.4")
Label size and description	Max. label width: 160 (240) mm (6.3" (9.5")) Outer wound, wide edge leading (typically)
	Standard reel Ø 300 mm (12") Core Ø 76 mm (3")
Labelling speed	Approx. 80 products/min.
Power supply	230V / 50 Hz 115 V / 60 Hz
Max. power consumption	800 VA, depending on model

We are constantly endeavouring to improve our products.
All technical data is therefore subject to change without prior notice.

HERMA GmbH
Labelling Systems Division
70324 Stuttgart / Germany
www.herma.com



ΚΩΔΙΚΟΠΟΙΗΣΗ - ΙΚΗΛΛΑΣΙΜΟΤΗΤΑ - ΔΙΑΧΕΙΡΙΣΗ ΠΑΡΑΓΩΓΗΣ

Αγ. Αθανασίου 17 Τ.Θ. 38
19002 Παιανία
marketing@theodorou.gr

Τηλ: 210 6690900
Fax: 210 6640200
www.theodorou.gr