

Small-budget top + bottom labelling machine


- > **Availability:** At very short notice
- > **Applicator:** The outstanding [HERMA 400](#)
- > **Flexible:** Available in standard lengths* of:
approx. 1500/2000 mm, or 60/80"
and four standard widths:
50/100/150/250 mm, or 2/4/6/10"


*individual lengths on request

A highly efficient combination of the top labeller 452 C and the bottom labeller 552 C that guarantees optimum productivity and flexibility.

If both **top** and **bottom labelling** are required, the two steps can be completed in a single pass.

Of course, the 652 C can also be used for top or bottom labelling only.

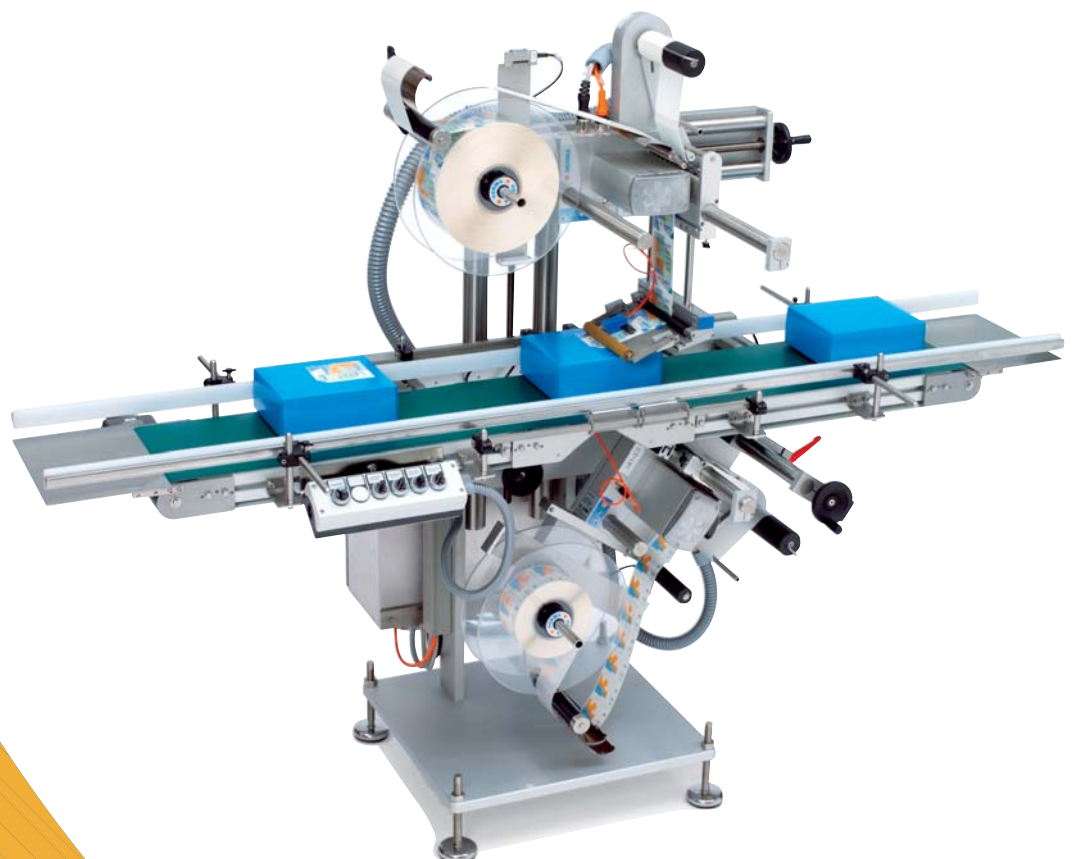

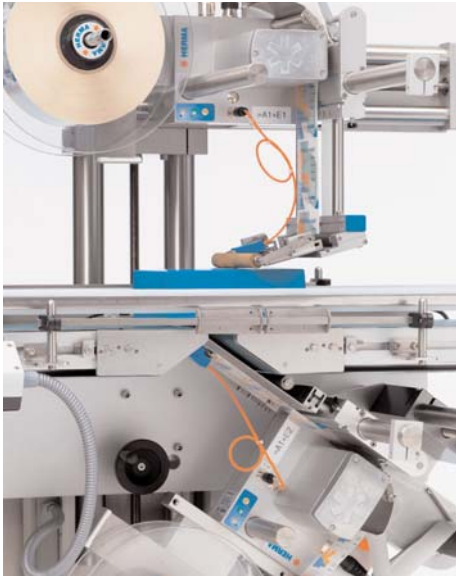

Top and bottom labeller: completing the job in a single pass.

Technical data of the 652 C

Products	Length	Any
	Width	260 mm (10.2") with standard belt
	Max. height	280 mm (11")
Labels	Max. reel Ø	300 mm (12") (standard)
	Width	120 mm (4.7") (max. standard)
Labelling speed	$\frac{\text{Conveyor belt speed [m/min.]} \times 1000}{\text{Product length [mm] + gap [mm]}} = \frac{\text{Products}}{\text{min.}}$	
Power supply	230V / 50 Hz	
	115 V / 60 Hz	
Power consumption	Approx. 650 VA	

We are constantly endeavouring to improve our products.
All technical data is therefore subject to change without prior notice.

HERMA GmbH
Labelling Systems Division
70324 Stuttgart / Germany
www.herma.com



ΚΩΔΙΚΟΠΟΙΗΣΗ · ΙΧΝΗΛΑΣΙΜΟΤΗΤΑ · ΔΙΑΧΕΙΡΙΣΗ ΠΑΡΑΓΩΓΗΣ

Αγ. Αθανασίου 17 Τ.Θ. 38
19002 Παιανία
marketing@theodorou.gr

Τηλ: 210 6690900
Fax: 210 6640200
www.theodorou.gr